


EASY-UP




The pneumatic EASY-UP is an ergonomic balancer equipped with a user-friendly one-hand controller and a safety hook as load-bearing device, making this a multifunctional lifting aid.

Advantages of this EASY-UP compared to a column jib or overhead crane:

- ❑ High lifting and lowering speed
- ❑ Knee arms for easy and light movement
- ❑ Easy positioning
- ❑ Parking brakes on the pivot points
- ❑ Fully pneumatic
- ❑ Easy to install yourself
- ❑ Delivery including mounting materials

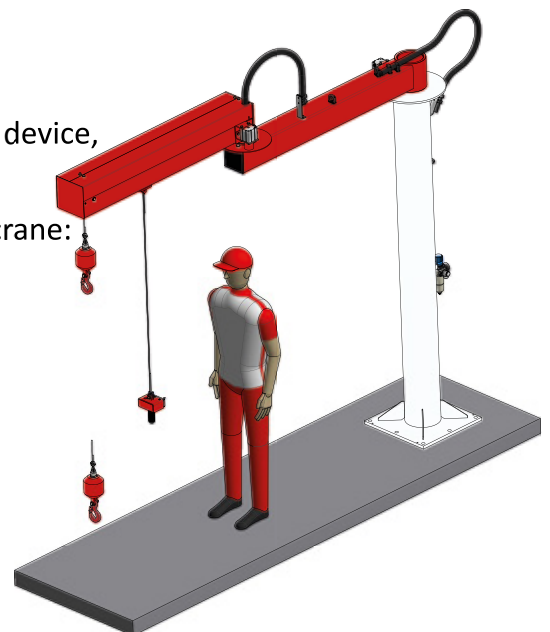

EASY-UP

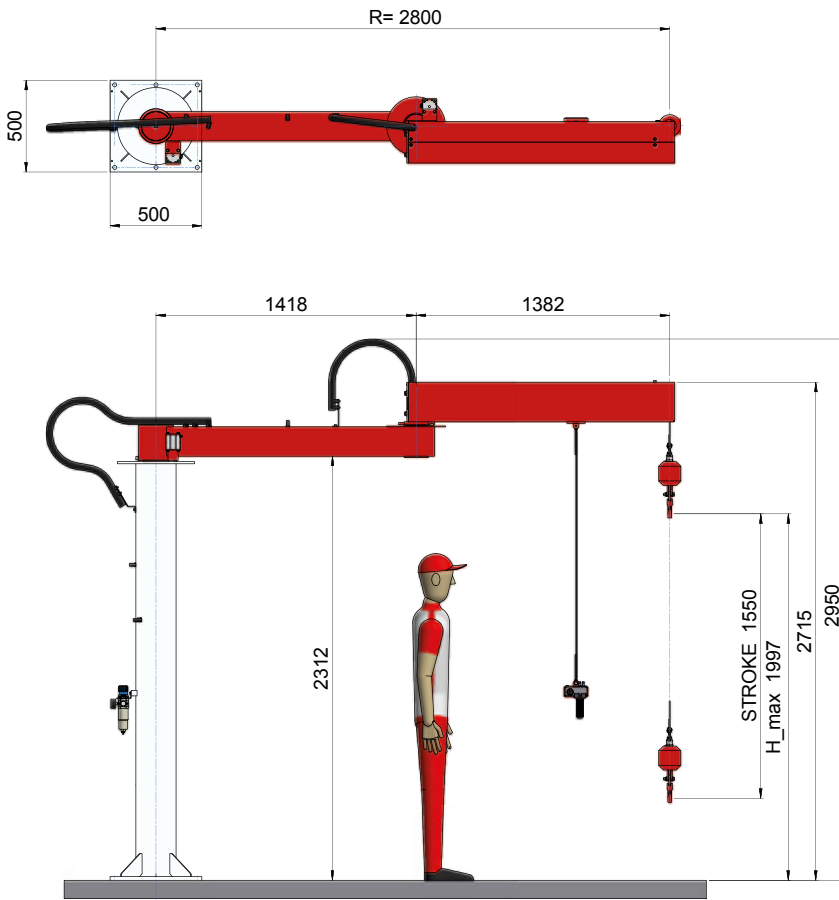

PLACING OF COLUMN

To be mounted with chemical anchors in a non-cracked concrete floor with a minimum thickness of 150 mm. In case of a thinner concrete floor the column can be equipped with a steel intermediate ground plate (optional).

MOVABILITY

The EASY-UP can be (optional) mounted on a steel plate 1500x1500x50 mm which can be handled easily by a forklift truck. This makes it easy to move the device around your work floor. Total mass incl. forklift plate approx. 1100 kg.

STEEL CABLE

The steel cable must be replaced with a maximum of 50,000 lifting cycles or at least once a year.

Besides the EASY-UP we also offer other standard handling solutions e.g. roll, axle and plate handling. Roosen BPL specializes in customer-specific lifting aids.

Your handling issues - we will gladly solve!

ROOSEN/BPL 

Exceeding expectations in *handling* solutions

De Giesel 19A, 6081 PG Haalen (NL)
T. +31 (0)475 59 01 02
bpl@bplhandling.com
www.bplhandling.com

TECHNICAL SPECIFICATIONS

Lifting capacity	: max. 125 kg
Radius range	: min. 500 mm, max. 2800 mm
Device height	: 2950 mm
Installation height	: min. 3000 mm
Compressed air supply	: min. 6 bar - clean and dry compressed air
Air consumption	: approx. 50 NI / cycle
Includes CE declaration	