



MaxION

Each individual emitter pin of the MaxION anti-static bar is coupled capacitively to the high voltage. You will therefore not get an electrical shock when the emitter pin is accidentally touched. The rugged MaxION static neutralising bar has a reinforced profile that minimises damage due to accidental bending. The ground reference is embedded in the reinforced profile. The slide slot on the backside of the MaxION enables the user to position the mounting bolts as required, allowing greater mounting flexibility. After cleaning the precision emitter pins with a brush you can sweep the contaminants out of each light-angled end of the bar easily.

Features:


- + Small dimensions
- + Rugged reinforced plastic profile
- + Medium distance neutralisation
- + Slide slot mounting
- + Enhanced use temperature

Simco-Ion Netherlands

Postbus 71
Lochem, The Netherlands NL-7240 AB
Tel: +31 (0)573 288333
Fax: +31 (0)573 257319
general@simco-ion.nl
www.simco-ion.nl

Technical specifications

Working distance	400 mm max.
Housing material	reinforced plastic
Emitter pins	special alloy
Cable	High voltage cable
Weight	0,6 kg/m
Ambient temperature	0- 70 °C
Use circumstances	Industrial
Operating voltage	5 kV AC
Suitable power unit	A2A5S/ MPM
Maximum length	5800 mm

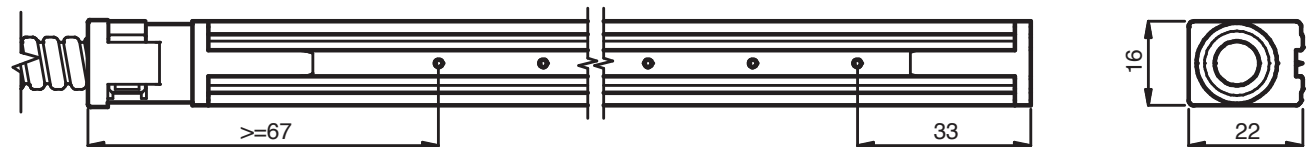

Technical drawing MaxION