

Maximum coverage = Effective length + 60


Effective length:
 Ex : 270 - 2790 mm (steps 180 mm)
 Ex Speed: 90 - 2790 mm (steps 60 mm)

R* min. R (fixed installation) = 25mm
 min. R (flexible installation) = 65mm

Cable exit options

Parts separate to order


Included Mounting brackets with mounting options

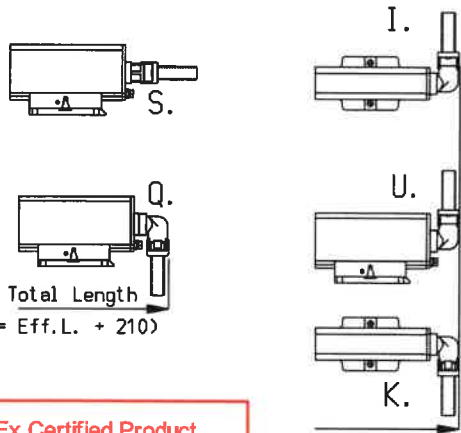

P/N: 4532000100

Brackets	
Tot. length	QTY
270 - 990	2
1050 - 1950	3
2010 - 2970	4

Optional Mounting brackets (Stainless steel)

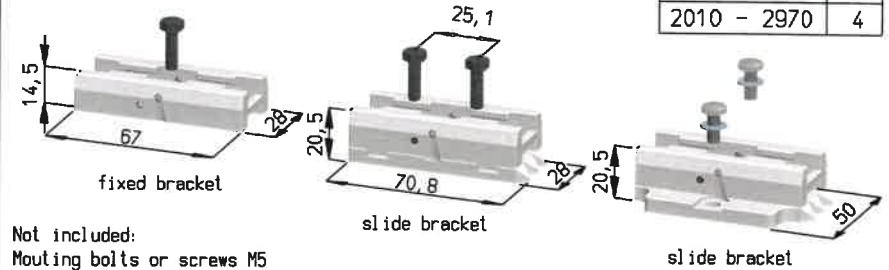

Not included:
 Mounting bolts or screws M5
 (type depending on option)

Ex Certified Product
 No modifications permitted without the approval of the "authorised person"

Total length
 (= Eff.L. + 205)